




Hard Ground Press-in Method



Tubular Sheet Pile Press-in Method

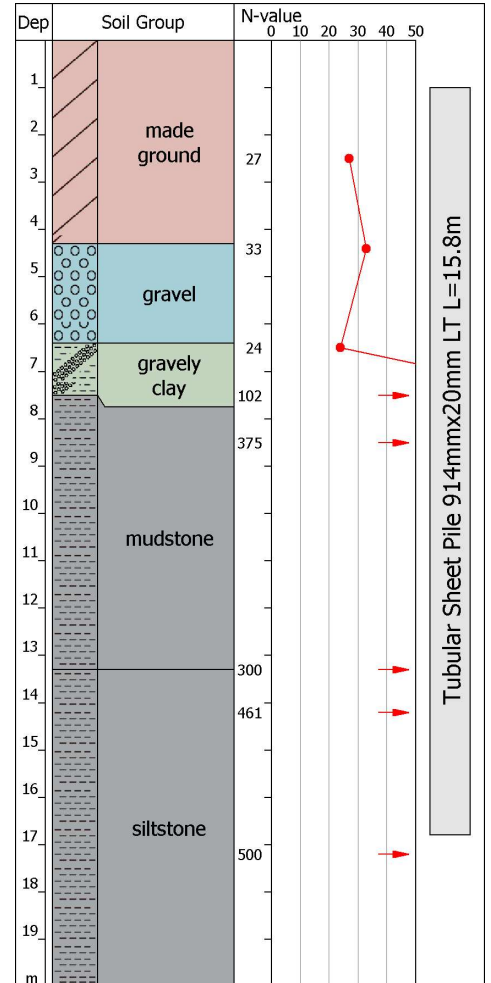

Project Name	St David's 2, Cardiff
Purpose of Piling	Construction of 2 level basement for new residential/ retail/ hotel building
Location	Cardiff, Cardiff, the UK, UNITED KINGDOM
Employer	St David's Partnership
Main Contractor	Bovis Lend Lease Ltd.
Piling Contractor	Giken Europe B.V.
Duration	November 2006 to September 2008
Press-in Machinery	Super Crush Tubular Piler SCP260 x 2
Pile Section & Length	Tubular Sheet Pile 914mm L = 10.5 -15.8m 205nos.
Features & Remarks	<p>*Rapid construction based on "Footingless Method" - Temporary free works.</p> <p>*Press-in work into weathered mudstone and siltstone.</p> <p>*Silent and vibration-free operation.</p>