

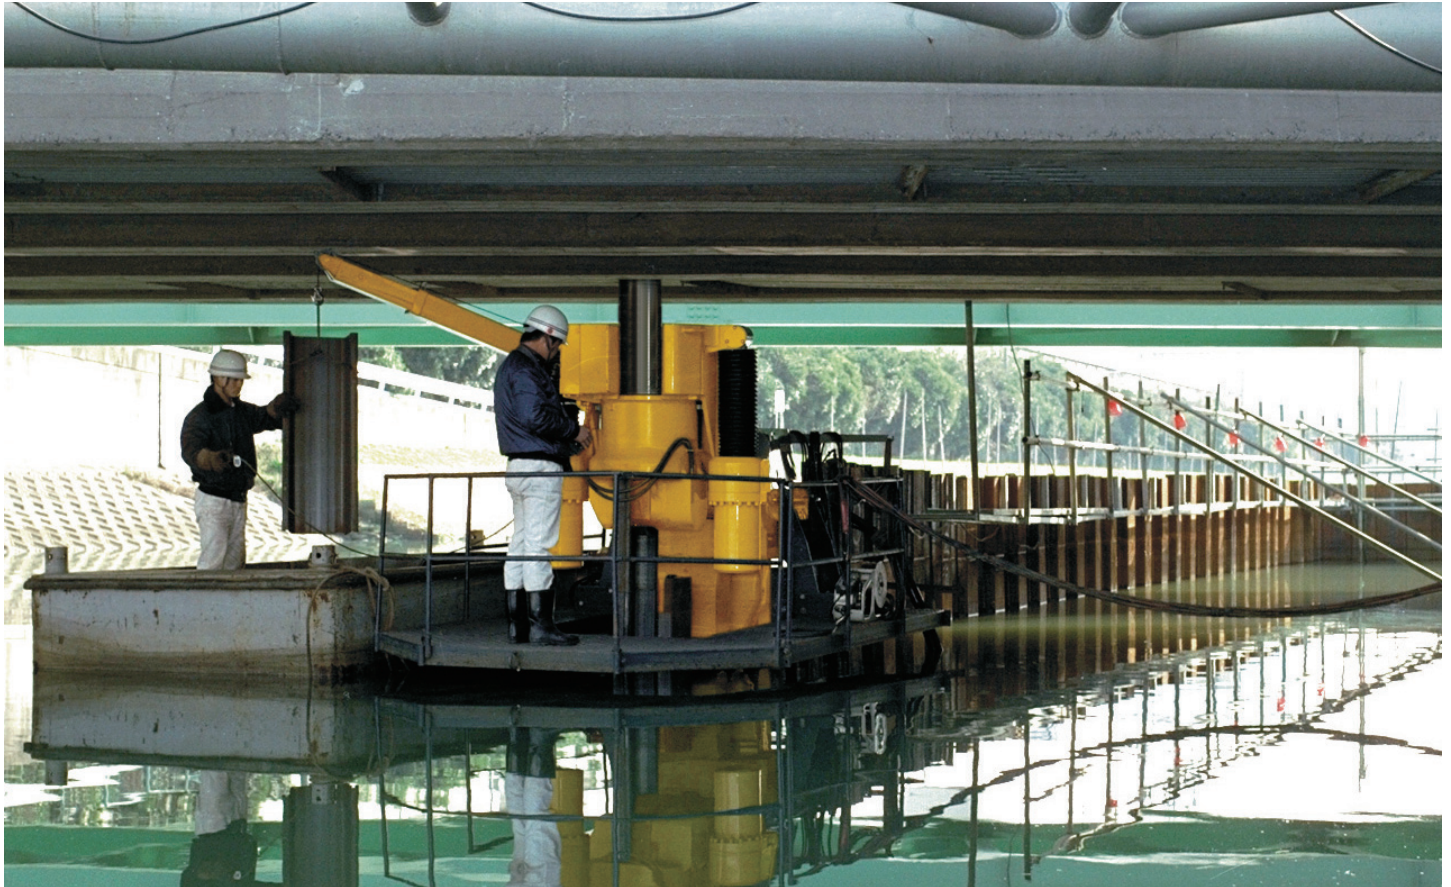


Mama River Baraki Bridge Repair Work

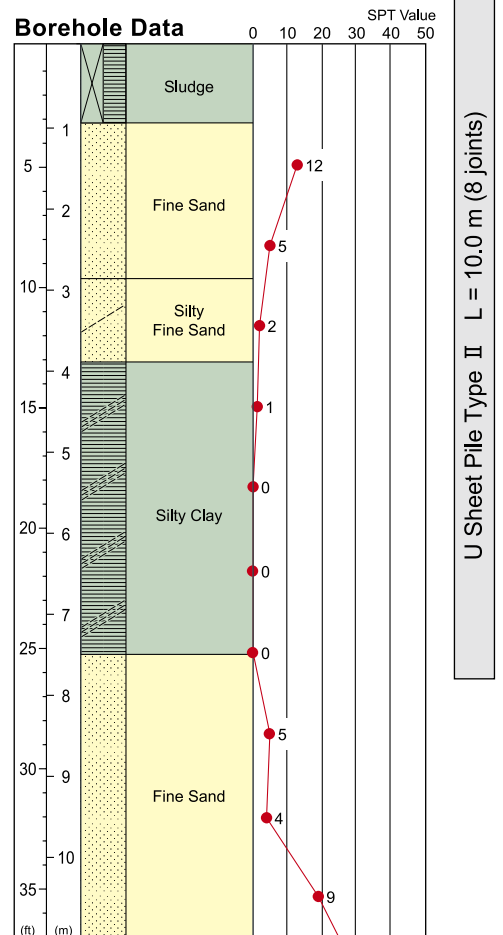

▼ Cross-section

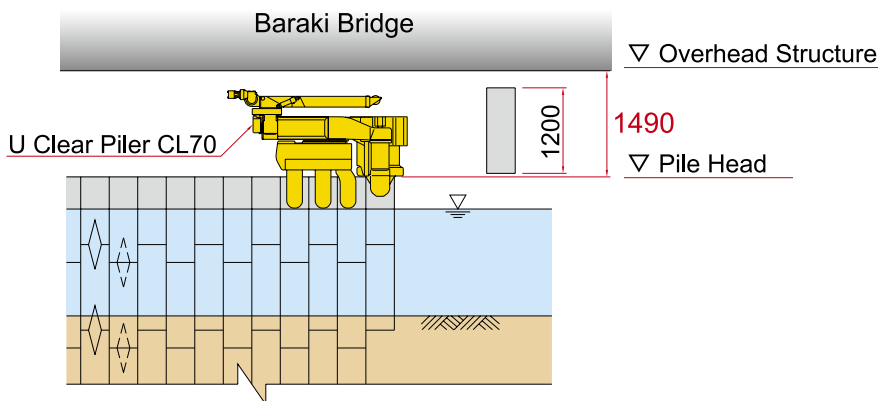

Type of Project	River Work
Purpose of Piling	Temporary cofferdam for foot protection of riverbank in the river dredging work
Site Location	Ichikawa, Chiba Prefecture, Japan
Duration of Work	November to December, 1992
Client	Chiba Prefectural Office for Improvement of Mama-river
Main Contractor	Konoike-Gumi Co., Ltd.
Piling Contractor	Giken Seko Co., Ltd.
Press-in System	Standard Press-in Method
Press-in Material	U Sheet Pile Type II L=10.0m (8 joints)
Press-in Machinery	U Clear Piler CL70
Method Description	Piling work was carried out under limited headroom (1.5 m) without disturbing the traffic on the bridge and industrial water supply. *NETIS No. CB-060016-A