
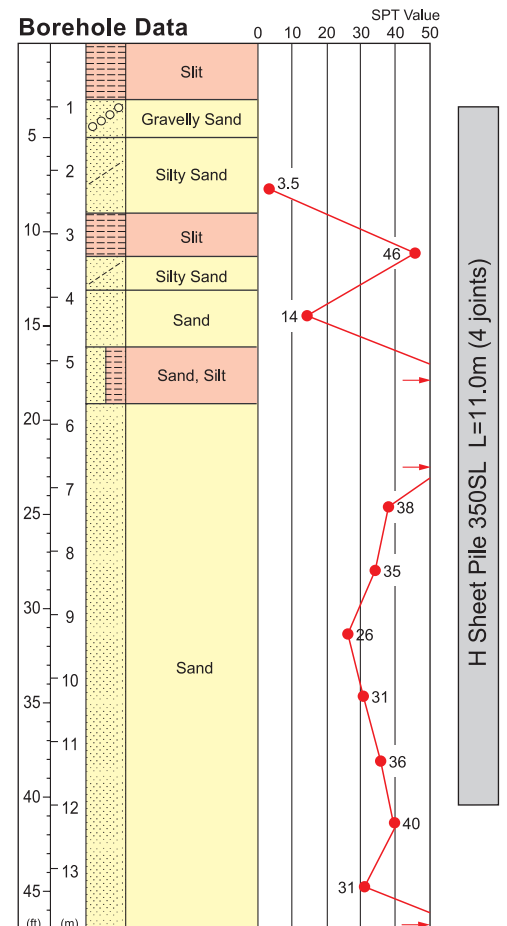


# Saka River Urban River Improvement Works (Phase 4)

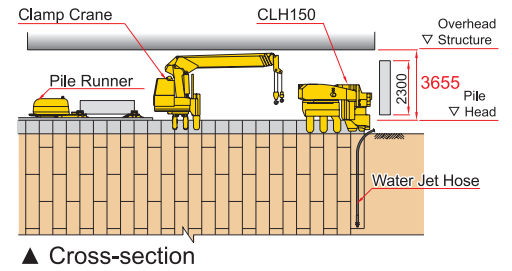

Type of Project	River Work
Purpose of Piling	Foot protection work for Riverbank Reinforcement Works
Site Location	Matsudo, Chiba Prefecture, Japan
Duration of Work	July to August, 1996
Client	Chiba Prefectural Public Works Office of Higashi Kastushika
Piling Contractor	Daito Kogyo Co., Ltd.
Piling Contractor	Giken Seko Co., Ltd.
Press-in System	Press-in Method with Water Jetting
Press-in Material	H Sheet Pile 350SL L=11.0m (4 joints)
Press-in Machinery	H Clear Piler CLH150, Clamp Crane, Pile Runner
Method Description	Safe and environmental friendly operation under the limited headroom (3.6m) without disturbing traffic on the bridge. *NETIS No. CB-060016-A