
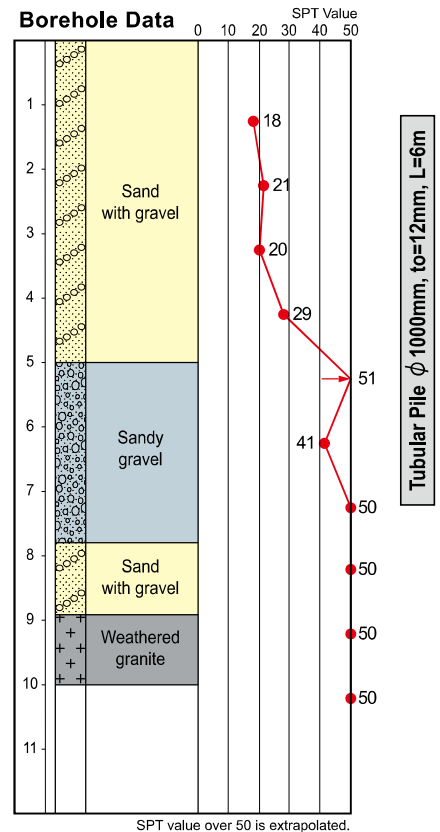
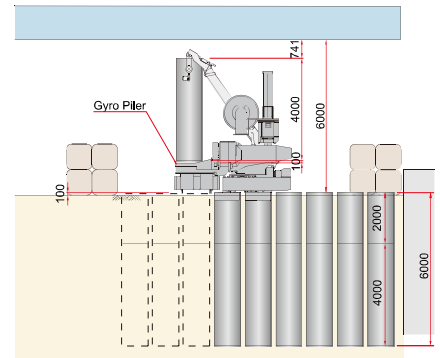


Oota River Restoration Project

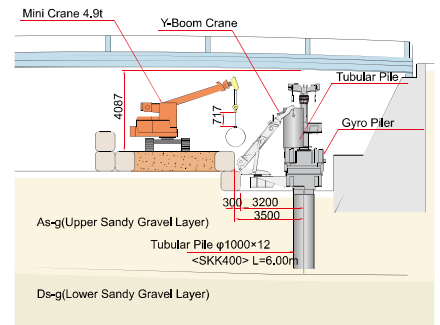

Type of Project	Restoration work of river embankment
Purpose of Piling	Retaining wall
Site Location	Hiroshima, Japan
Duration of Work	Feb 2008 - Mar 2008
Client	Hiroshima Prefecture Regional Office
Piling Contractor	Giken Seko Co.,Ltd.
Press-in System	Gyropress Method
Press-in Material	Tubular Pile, D 1000mm, to=12mm, L=6m (4m+2m), no=22
Press-in Machinery	Gyro Piler SP6
Method Description	Piling under overhead obstruction. Penetrating through boulders (500 - 600mm)