


Municipal Boat House Rehabilitation

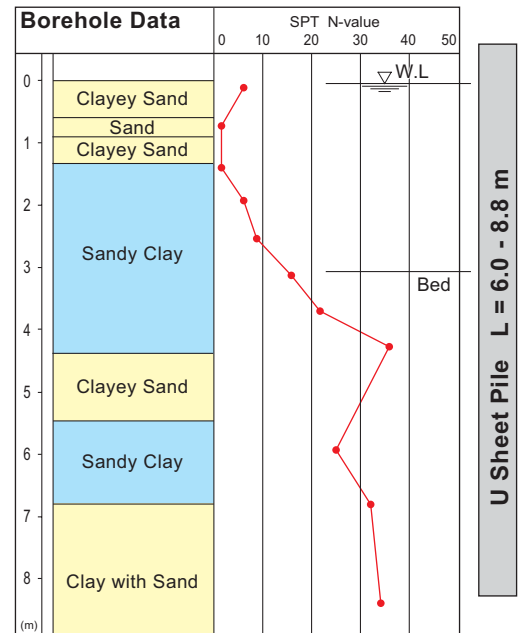

Type of Project	Public Works, Shore Project
Purpose of Piling	Dyke Reinforcement
Site Location	San Anselmo, CA, USA
Duration of Work	From 06 Mar 2006
Client	City of Oakland
Consultant	Pirooz Barar & Associates, Inc.
Main Contractor	BBI Construction

Piling Contractor	Giken America Corporation
Press-in Material	U Sheet Pile LX16 L= 6.0 - 8.8 m 178 pieces
Press-in Machinery	U Piler UP150, Clamp Crane CB2-8, Unit Runner
Method Description	Piling work close to existing temporary dock. No access on adjacent water way. Temporary staging and temporary works are not required for piling operation with Giken Reaction Base System.