




Sandalwood Canal Improvements







			N. K.
Type of Project	Canal Improvements		
Purpose of Piling	Canal Wall		
Site Location	Jacksonville, Florida, U.S.A.		
Duration of Work	08 November, 2007 to 13 February, 2008		
Client	City of Jacksonville	Main Contractor	Felix Associates, LLC.
Consultant	CDM	Piling Contractor	Giken America Corporation
Press-in System	Z Press-in Method		
Press-in Material	Z Sheet Pile PZC18 L=23.0ft - 30.0ft (7.0m - 9.0m) N=953pair		
Press-in Machinery	Super Crush Z Piler SCZ-675WM 10t Clamp Crane		
Method Description	The Press-in system and GRB system was specified by the owner to prevent soil erosion from neighboring properties along a very tight difficult access canal alignment.		

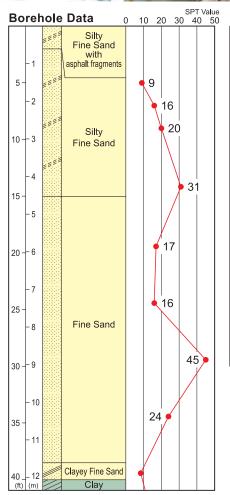

Z Sheet Pile PZC18 L = 30.0ft (9.0m)